


Maped, edited, and published by the Geological Survey  
Control by USGS and USCGS  
Topography by photogrammetric methods from aerial  
photographs taken 1959. Field checked 1961  
Polyconic projection. 1927 North American datum  
10,000-foot grid based on Ohio coordinate system, north zone  
1000-meter Universal Transverse Mercator grid ticks,  
zone 16, shown in blue  
Fine red dashed lines indicate selected fence and field lines where  
generally visible on aerial photographs. This information is unchecked  
Areas covered by dashed light-blue pattern are subject to  
controlled inundation to 936 feet by Lockington Dam  
Land lines north of Greenville Treaty Line based on the First  
Principal Meridian. Land lines south of Greenville Treaty Line  
based on the Great Miami River Base  
Reservation boundary from maps by Ohio Department of  
Natural Resources, Division of Parks

APPROXIMATE MEAN  
DECLINATION, 1961

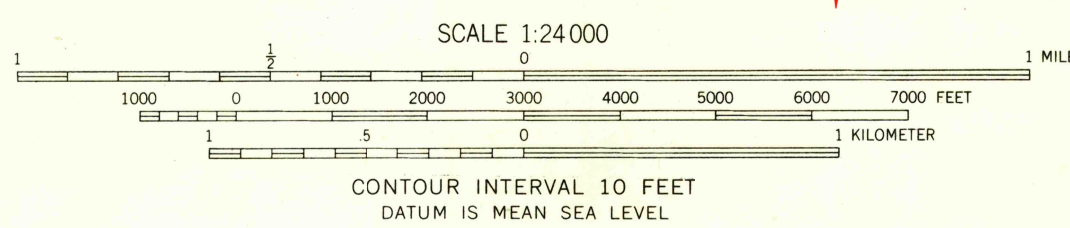

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USGS  
Historical Files  
Topographic Division



ROAD CLASSIFICATION  
Heavy-duty ——— Light-duty ———  
Medium-duty ——— Unimproved dirt ———  
State Route

FORT LORAMIE, OHIO  
SE 1/4 LORAMIE 15 QUADRANGLE  
N4015-W8415/7.5

1961  
TOPOGRAPHIC DIVISION