






## V501, EDITION 3

Prepared by the U.S. Army Topographic Command (KCLD), Washington, D.C. Compiled in 1958 by photogrammetric methods and from United States quadrangles, 1:24,000, 1957; National Topographic Series, 1:50,000, 1:63,360; Army Survey Establishment, 1937-55; and U.S. Lake Survey Charts, 3, 33, 34, 1957. United States area field checked 1959. United States area revised in 1972 by the U.S. Geological Survey from aerial photographs taken 1972.

Selected hydrographic data compiled from U.S. Lake Survey Charts. This information is not intended for navigational purposes.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

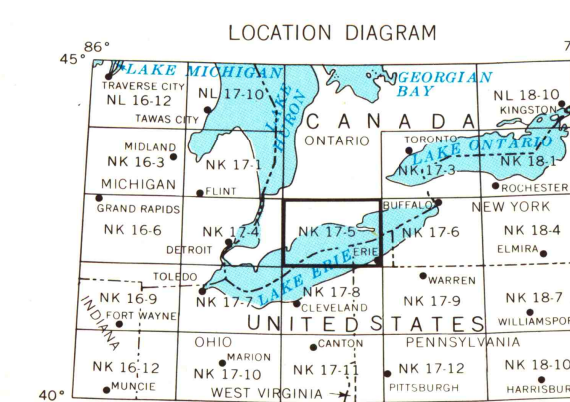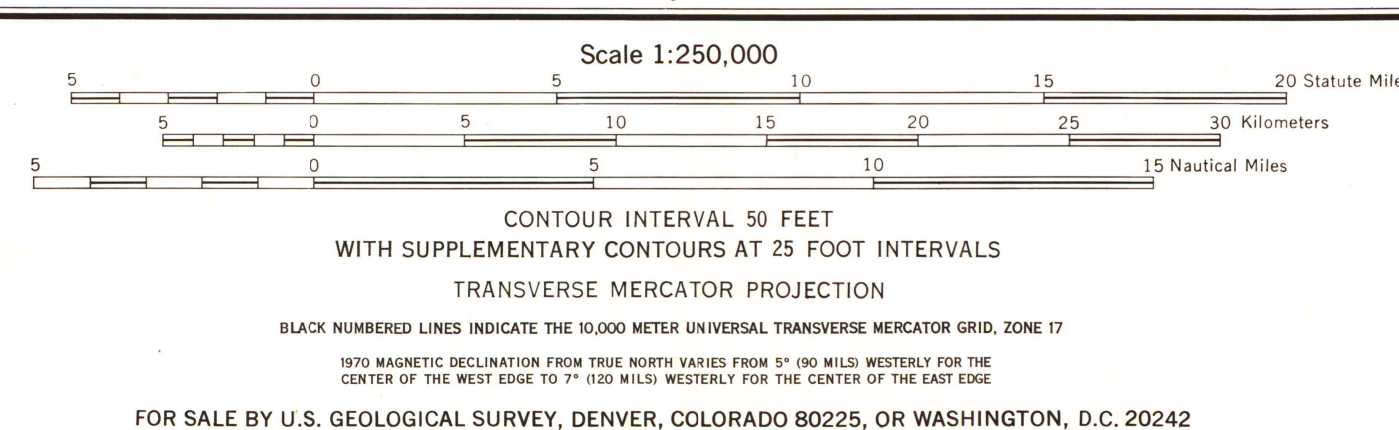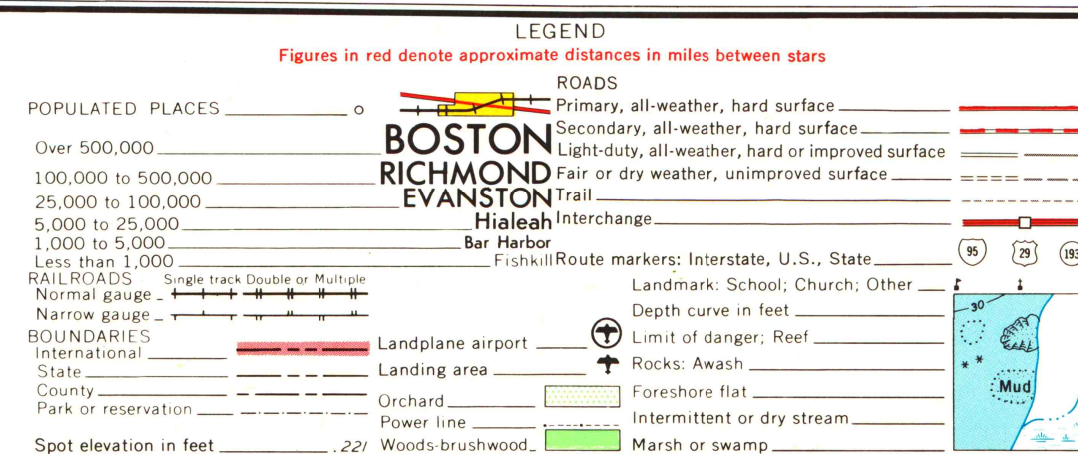

GRID ZONE DESIGNATION		TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS	
MT	NT	17	50
MS	NS	17	50
SAMPLE POINT: COPENHAGEN		SAMPLE REFERENCE: 170104	
1. Read letters identifying 100,000 meter square in which the point lies.		2. Locate first vertical and line to left of point and read LARGE figure labeling the line either in the top or bottom margin, or in the line itself.	
3. Estimate tenths from grid line to point.		4. Locate first horizontal and line below point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.	
5. Estimate tenths from grid line to point.		6. If reporting beyond 10' in any direction, prefix Grid Zone Designation, etc.	