


Produced by the United States Geological Survey
Topography compiled by planetable surveys 1948. Planimetry derived from imagery taken 1997 and other sources.
North American Datum of 1983 (NAD 83). Projection and 1 000-meter grid: Universal Transverse Mercator, zone 17. 2 500-meter ticks: North Carolina Coordinate System of 1983.
North American Datum of 1927 (NAD 27) is shown by dashed corner ticks. The values of the shift between NAD 83 and NAD 27 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software.

UTM GRID AND 2001 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET



CONTOUR INTERVAL 10 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048

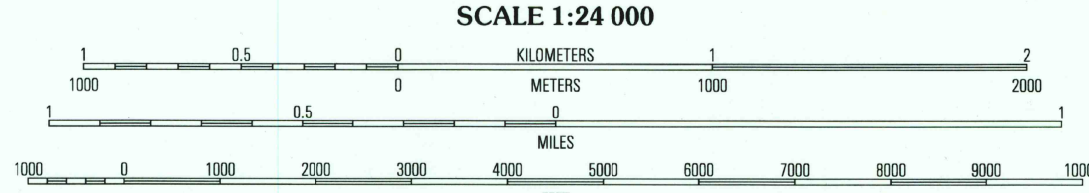

QUADRANGLE LOCATION

ROAD CLASSIFICATION

- Primary highway: hard surface (solid line), improved surface (dashed line)
- Secondary highway: hard surface (dashed line), unimproved road (dotted line)
- Interstate Route (thick red line with shield)
- U.S. Route (red line with shield)
- State Route (red line with shield)

| | | |
|---|---|---|
| 1 | 2 | 3 |
| 4 | 5 | 6 |
| 7 | 8 | 9 |

GUILFORD, NC
1997

NIMA 5056 III SW-SERIES V842

RECEIVED
JUL 31 2001

USGS NWU
HISTORICAL MAP ARCHIVES



ISSN 0-47-9422-5
9 780607 924220