



Produced by the United States Geological Survey  
Topography compiled 1934. Planimetry derived from imagery taken 1955 and other sources. Survey control current as of 1956.  
Selected hydrographic data compiled from NOS Charts 286 (1954) and 375 (1953). This information is not intended for navigational purposes.  
North American Datum of 1983 (NAD 83). Projection and 1 000-meter grid. Universal Transverse Mercator, zone 18 2500-meter ticks. New Jersey Coordinate System of 1983 and New York Coordinate System of 1983 (Long Island zone).  
North American Datum of 1927 (NAD 27) is shown by dashed corner ticks. The values of the shift between NAD 83 and NAD 27 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software.  
There may be private inholdings within the boundaries of the National or State reservations shown on this map.  
Landmark buildings verified 1956.

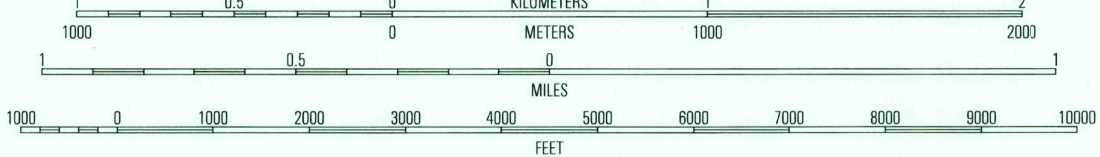

CONTOUR INTERVAL 20 FEET  
NATIONAL GEODETIC VERTICAL DATUM OF 1929  
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048  
DEPTH CURVES AND SOUNDINGS IN FEET. DATUM IS MEAN LOWER LOW WATER  
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE  
THE MEAN RANGE OF TIDE IS APPROXIMATELY 5.3 FEET



1	2	3
4	5	6
7	8	9

ROAD CLASSIFICATION  
Primary highway hard surface .....  
Secondary highway hard surface .....  
Light-duty road, hard or improved surface .....  
Unimproved road .....  
Interstate Route .....  
U.S. Route .....  
State Route .....

PERTH AMBOY, NJ-NY  
1995

FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

NIMA 6165 III SE-SERIES V822

RECEIVED  
NOV 3 0 2000

HISTORICAL MAP ARCHIVES

