



Produced by the United States Geological Survey
Topography compiled 1947. Planimetry derived from imagery taken 1983 and other sources. Photoinspected using imagery dated 1995; no major culture or drainage changes observed. Survey control current as of 1948. Boundaries, other than corporate, revised 1999
North American Datum of 1927 (NAD 27). Projection and 10 000-foot ticks: New Jersey coordinate system (transverse Mercator)
1000-meter Universal Transverse Mercator grid, zone 18
North American Datum of 1983 (NAD 83) is shown by dashed corner ticks. The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are obtainable from National Geographic Survey NADCON software
There may be private inholdings within the boundaries of the National or State reservations shown on this map
Information shown in purple may not meet USGS content standards and may conflict with previously mapped contours

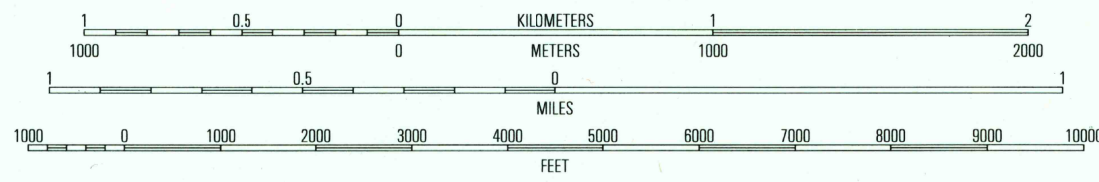

CONTOUR INTERVAL 10 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048
SHORELINE SHOWN REPRESENTS THE APPROXIMATE LINE OF MEAN HIGH WATER
THE AVERAGE RANGE OF TIDE IS APPROXIMATELY 5.6 FEET



QUADRANGLE LOCATION

1	2	3
4	5	6
7	8	9

1 Wilmington South
2 Penns Grove
3 Woodstown
4 Delaware City
5 Alloway
6 Taylor Bridge
7 Canton
8 Shiloh

ROAD CLASSIFICATION
Primary highway
hard surface
Secondary highway
hard surface
Interstate Route
U.S. Route
State Route
Light-duty road, hard or
improved surface
Unimproved road

SALEM, NJ

1995

NIMA 5963 III SW-SERIES V822

RECEIVED
JUL 31 1999
USGS M&D
HISTORICAL MAP ARCHIVES

