
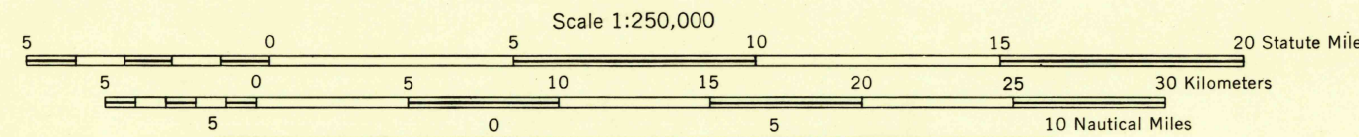


AMS V501

Prepared by the Army Map Service (AMS), Corps of Engineers, U. S. Army, Washington, D. C. Compiled in 1953 by photogrammetric methods and from: United States Quadrangles, 1:24,000, 1:25,000, 1:50,000, 1:62,500, 1:100,000, U. S. Geological Survey and Corps of Engineers, 1943-50; County Highway Maps, Planimetric detail revised by photogrammetric methods. Map field checked, 1953.

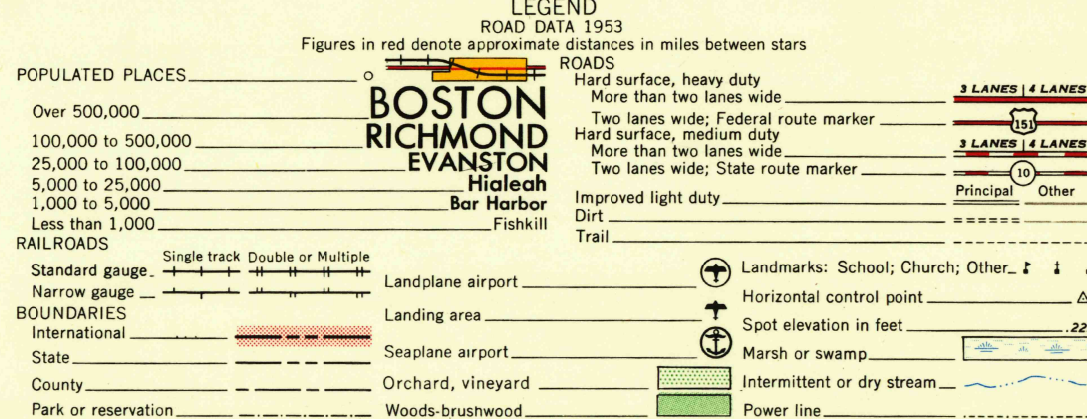



CONTOUR INTERVAL 50 FEET WITH  
SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS

TRANSVERSE MERCATOR PROJECTION

100,000 FOOT GRIDS BASED ON NORTH CAROLINA COORDINATE SYSTEM  
AND SOUTH CAROLINA COORDINATE SYSTEM, NORTH ZONE

1950 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 2°50' WESTERLY FOR THE CENTER OF THE WEST  
EDGE TO 3°30' WESTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°01' EASTERLY.

FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.

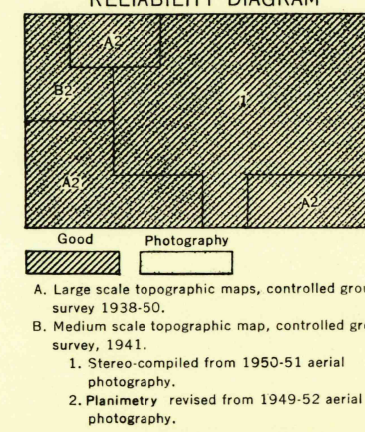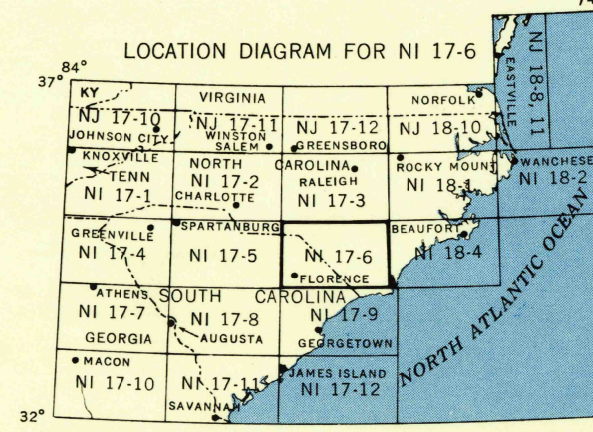

PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS, 12-54 - 91261

FLORENCE, S. C.; N. C.

USGS  
Historical File  
Topographic Division

Printed for G.S. by A.M.S.  
1-3-55 (3297)