


CLAYTON LAKE, MAINE-QUEBEC

30 X 60 MINUTE SERIES (TOPOGRAPHIC)

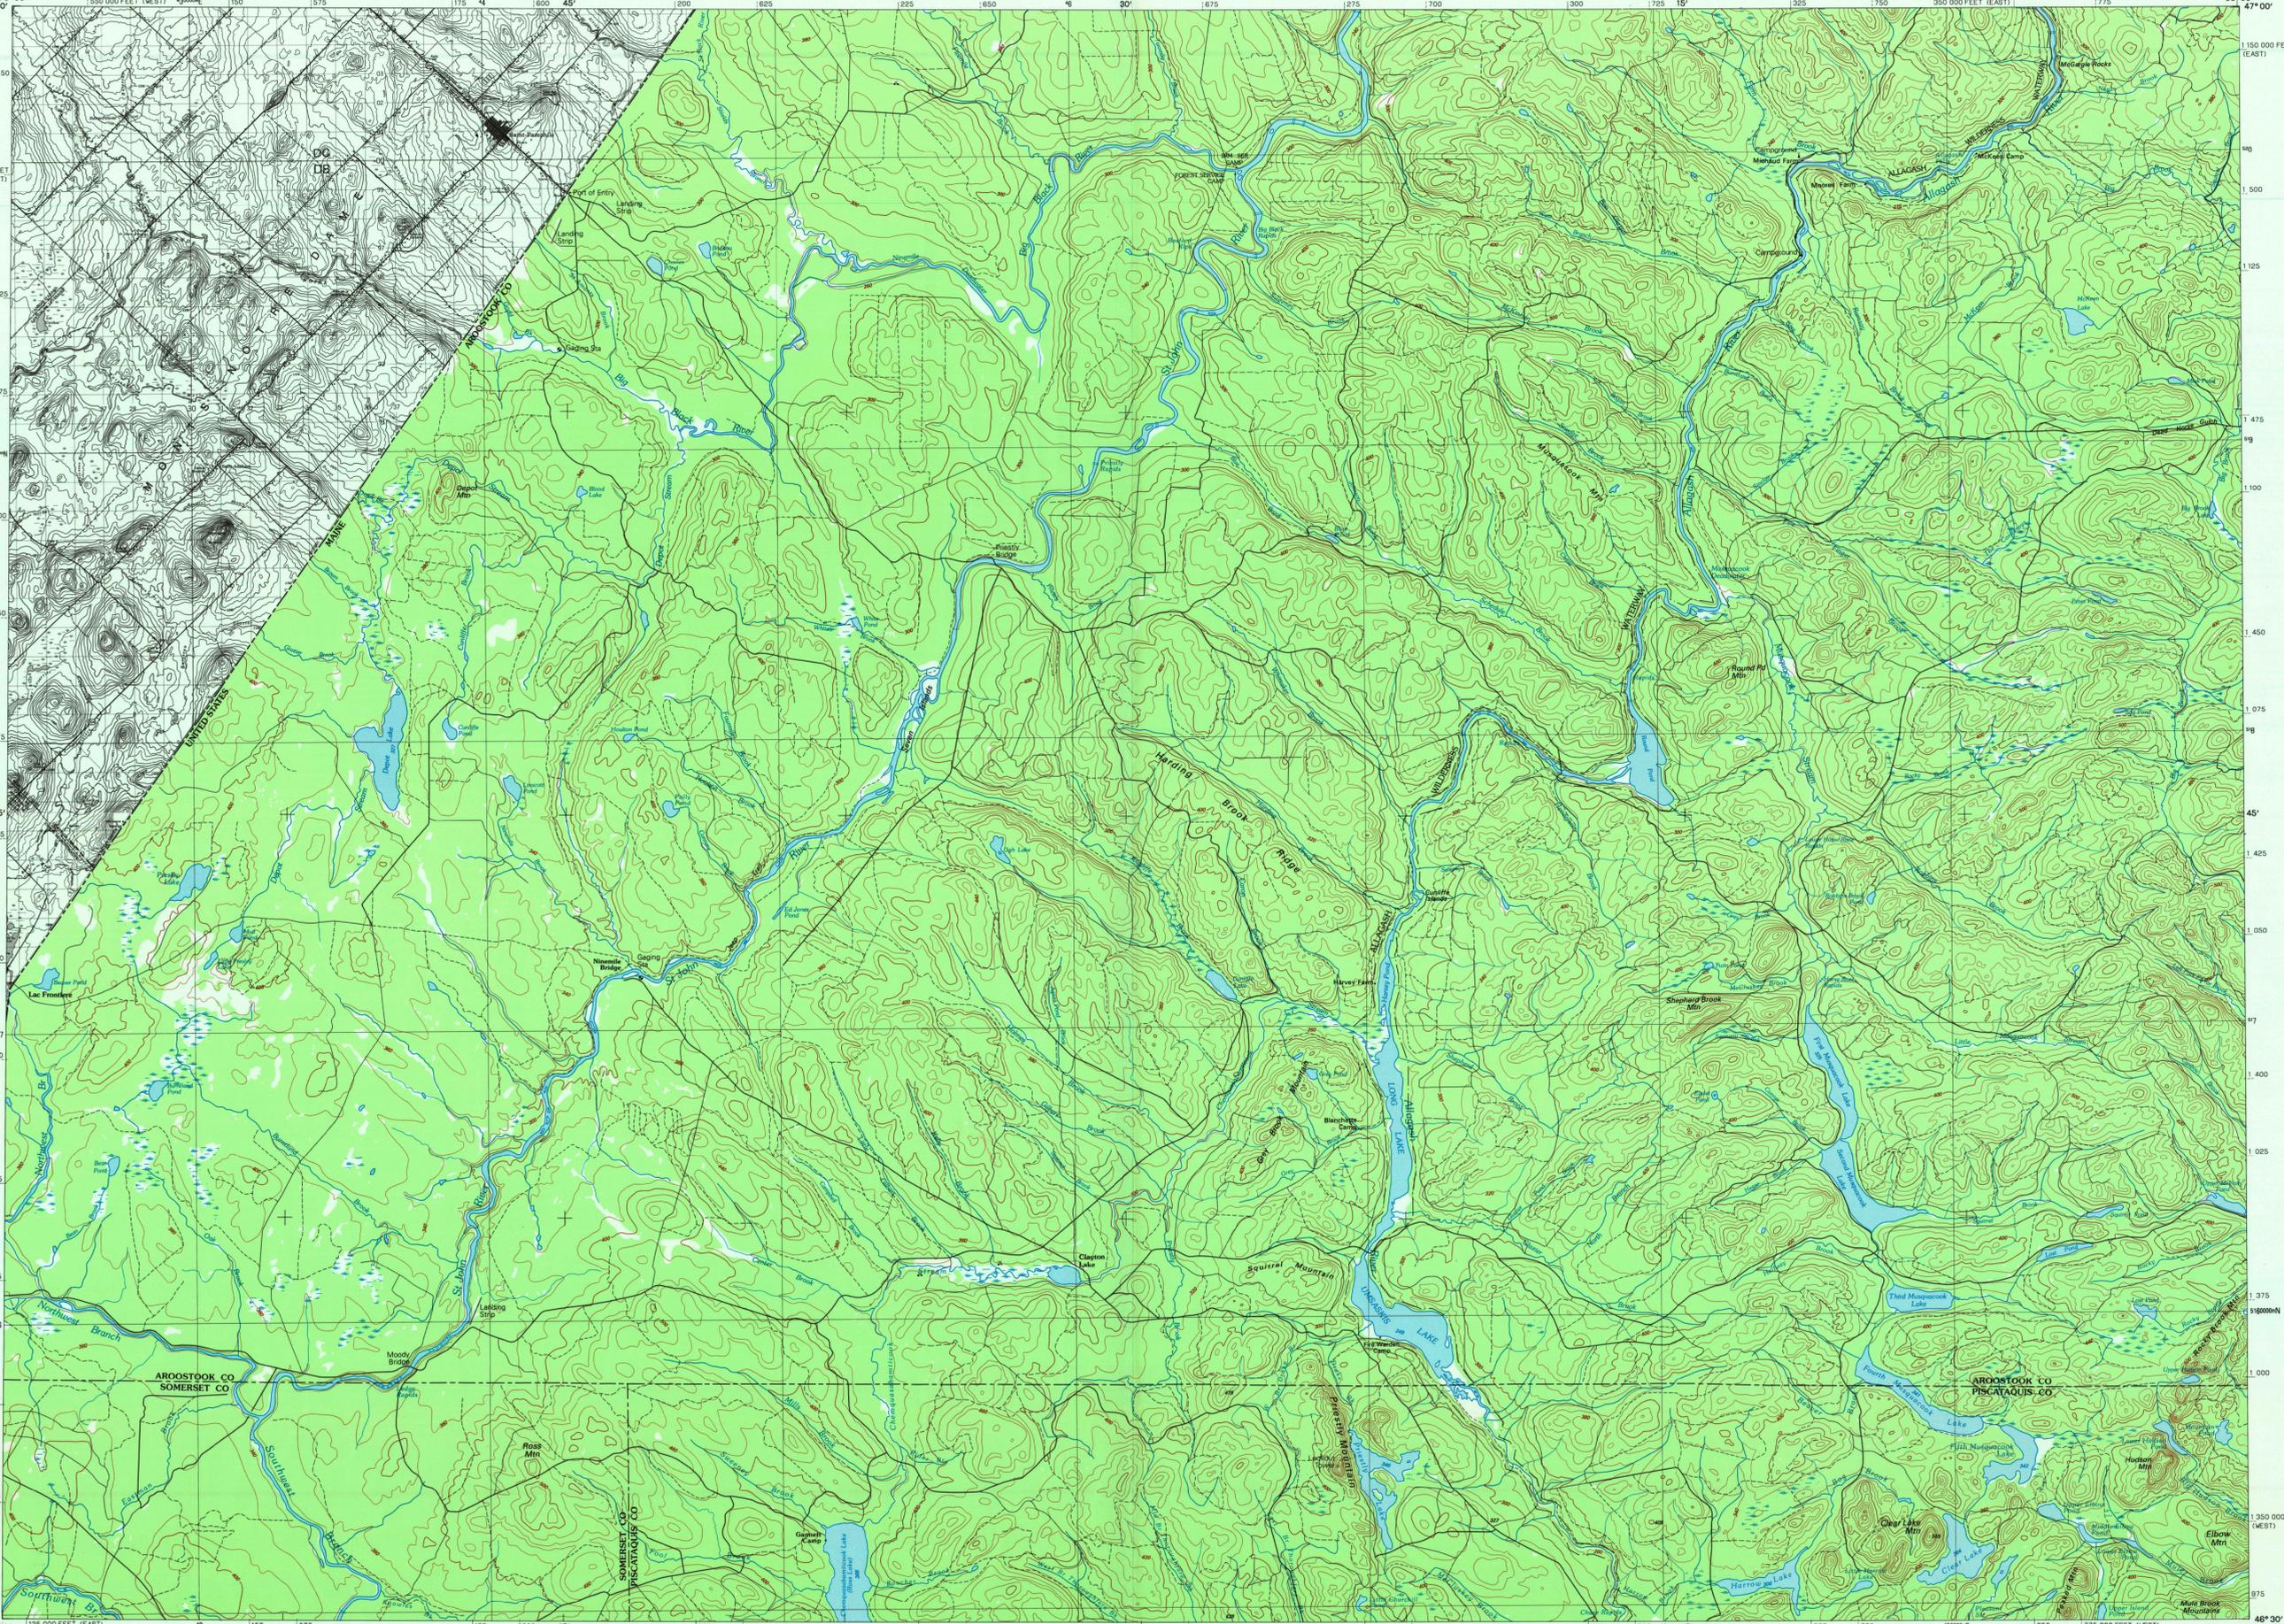

Clayton Lake

MAINE-QUEBEC

1:100 000-scale metric topographic map



30 X 60 MINUTE QUADRANGLE SHOWING

- Contours and elevations in meters
- Highways, roads and other manmade structures
- Water features
- Woodland areas
- Geographic names



Produced by the United States Geological Survey
 Compiled from USGS 1:24 000 and 1:62 500-scale topographic maps dated 1928-65. Planimetry revised from aerial photographs taken 1990 and other source data. Revised information not field checked. Map edited 1993. Canadian portion copied from Department of Energy, Mines and Resources, 1:50,000-scale topographic maps dated 1980.

Canadian portion of this map © by Her Majesty the Queen in Right of Canada, and may not be reproduced or redistributed without express consent of Energy, Mines and Resources Canada, 4th Floor, 615 Booth Street, Ottawa, Ontario, K1A 0E9.

1927 North American Datum (NAD 27). Projection and 10 000-meter grid: Universal Transverse Mercator, zone 19 25 000-foot ticks. Metric coordinate system, east and west zones.

The difference between NAD 27 and North American Datum of 1983 (NAD 83) is too small to show at this scale. The values of the shift between the datums for 7.5-minute intersections are given in USGS Bulletin 1573.

There may be private inholdings within the boundaries of the National or State reservations shown on this map.

CONTOUR INTERVAL 20 METERS IN UNITED STATES
 CONTOUR INTERVAL 25 FEET IN CANADA
 NATIONAL GEODETIC VERTICAL DATUM OF 1929
 ELEVATIONS SHOWN TO THE NEAREST METER IN UNITED STATES
 ELEVATIONS SHOWN TO THE NEAREST FOOT IN CANADA
 THE U.S. PORTION OF THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS

CONVERSION TABLE		DECLINATION DIAGRAM		ADJOINING MAPS		
Meters	Feet	MAGNETIC		1	2	3
1	3.2808	19°		4	5	
2	6.5617	0°		6	7	8
3	9.8425	19°				
4	13.1234	0°				
5	16.4042	19°				
6	19.6850	0°				
7	22.9659	19°				
8	26.2467	0°				
9	29.5276	19°				
10	32.8084	0°				

To convert meters to feet multiply by 3.2808
 To convert feet to meters multiply by 0.3048

UTM grid convergence (GN) and 1993 magnetic declination (MN) at center of map. Diagram is approximate.

1 Allagash
 2 Madawaska
 3 Montserrat
 4 Presque Isle
 5 Lac Eichenin
 6 Chamberlain Lake
 7 Chamberlain Lake
 8 Oakfield


FOR SALE BY U.S. GEOLOGICAL SURVEY
 DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092



Topographic Map Symbols

- Primary highway, hard surface
- Secondary highway, hard surface
- Light duty road, principal street, hard or improved surface
- Other road or street, trail
- Route marker: Interstate, U.S., State
- Railroad: standard gage, narrow gage
- Bridge: overpass, underpass
- Tunnel: road, railroad
- Build-up area: seafile, elevation
- Airport: landing field, landing strip
- National boundary
- State boundary
- County boundary
- Civil township boundary
- National or State reservation boundary
- Land grant boundary
- U.S. public lands survey: range, township, section
- Range, township, section line: protracted
- Power transmission line; pipeline
- Dam; dam with lock
- Cemetery; building
- Windmill; water well; spring
- Water shaft; adit or cave; mine, quarry; gravel pit
- Campground; picnic area; U.S. location monument
- Ruins; cliff dwelling
- Distorted surface: strip mine, lava; sand
- Contours: index; intermediate; supplementary
- Bathymetric contours: index; intermediate
- Stream, lake: perennial; intermittent
- Swamp, large and small; falls, large and small
- Area to be submerged; marsh, swamp
- Land subject to controlled inundation; woodland
- Scrub; mangrove
- Orchard; vineyard

• INTERIOR—GEOLOGICAL SURVEY, RESTON, VIRGINIA—1994



SCALE 1:100 000
 1 CENTIMETER ON THE MAP REPRESENTS 1 KILOMETER ON THE GROUND
 CONTOUR INTERVAL 20 METERS IN UNITED STATES
 CONTOUR INTERVAL 25 FEET IN CANADA

CLAYTON LAKE, MAINE-QUEBEC

46069-E1-TM-100

1993

A pamphlet describing topographic maps is available on request.