

V501, EDITION 3

Prepared by the U.S. Army Topographic Command (AJBM), Washington, D.C. Compiled in 1954 by photogrammetric methods. Aerial photographs taken 1952, field annotated 1953. Revised in 1974 by the U.S. Geological Survey from aerial photographs taken 1972.

Area covered by dashed light-blue pattern is subject to controlled inundation.

100,000-foot grid based on Indiana coordinate system, east zone, Ohio coordinate system, south zone, and Kentucky coordinate system, north zone.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars.

POPULATED PLACES

- Over 500,000
- 100,000 to 500,000
- 25,000 to 100,000
- 5,000 to 25,000
- 1,000 to 5,000
- Less than 1,000

ROADS




- Primary, all-weather, hard surface
- Secondary, all-weather, hard surface
- Light-duty, all-weather, hard or improved surface
- Fair or dry weather, unimproved surface
- Trail
- Interchange
- Bar Harbor
- Route markers: Interstate, U.S., State

RAILROADS

- Standard gauge
- Single track double or multiple
- Narrow gauge
- Landplane airport
- Landing area
- Seaplane airport
- Seaplane anchorage
- Woods brushwood

Landmarks: School; Church; Other

- Mine
- Spot elevation in feet
- Marsh or swamp
- Intermittent or dry stream
- Power line

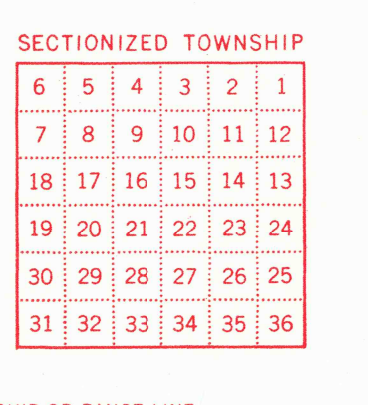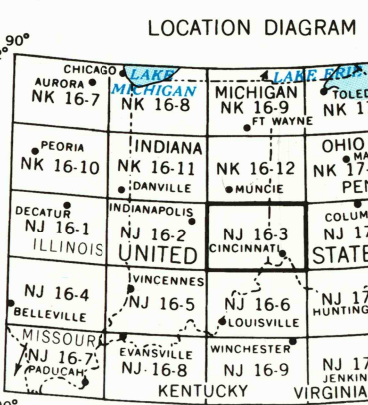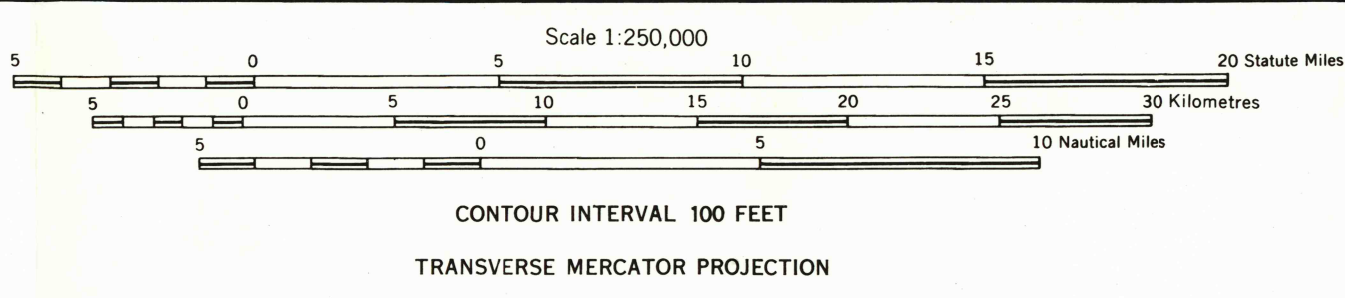

GRID ZONE DESIGNATION: 16S

100,000 M. SQUARE IDENTIFICATION

EV	FV	GV
EU	FU	GU

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

1. Read letters identifying 100,000 metre squares in which the point lies.

2. Locate first VERTICAL and line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin or on the line itself.

3. Estimate tenths from and line to point.

4. Locate first HORIZONTAL and line to point and read LARGE figure labeling the line either in the top or bottom margin or on the line itself.

5. Estimate tenths from and line to point.

EXAMPLE REFERENCE: 4320000

IF REPORTING BEYOND 18" IN ANY DIRECTION, prefix Grid Zone Designation, e.g. 16S033775

CINCINNATI, OHIO; INDIANA; KENTUCKY

1953
REVISED 1974

STOCK NO. V501XU163***03

MAR 2 1993

6500