

To convert feet to meters
multiply by 3.048

To convert meters to feet
multiply by 3.2808

Produced by the United States Geological Survey



Control by USGS, NOS/NOAA, Tennessee Valley Authority,
and Georgia Geodetic Survey

Compiled by photogrammetric methods from aerial photographs
taken 1975. Field checked 1975. Map edited 1983
Supersedes Tennessee Valley Authority map dated 1946

Projection and 10,000-foot grid ticks: Georgia coordinate
system, west zone (transverse Mercator), 1000-meter Universal
Transverse Mercator grid, zone 16. 1927 North American Datum
To place on the predicted North American Datum 1983 move the
projection lines 6 meters south and 4 meters west as shown
by dashed corner ticks


Area covered by dashed light-blue pattern is subject to
controlled inundation to 250 meters

Fine red dashed lines indicate selected fence and field lines where
generally visible on aerial photographs. This information is unchecked

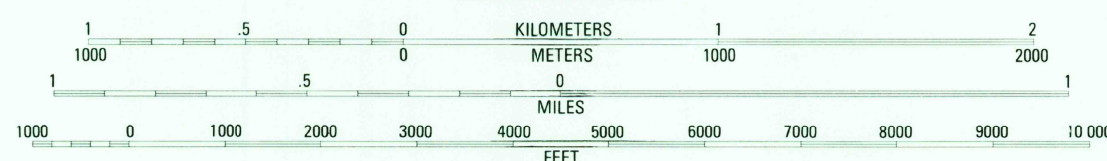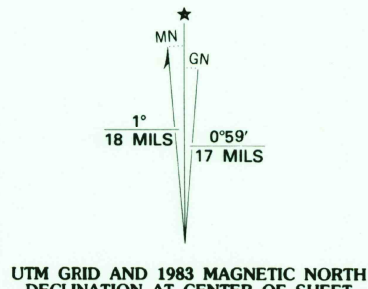

CONTOUR INTERVAL 10 METERS
NATIONAL GEODETIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST METER

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
AND U. S. TENNESSEE VALLEY AUTHORITY, CHATTANOOGA, TENN. 37401, OR KNOXVILLE, TENN. 37902
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



CONTOURS AND ELEVATIONS
IN METERS

ROAD CLASSIFICATION

Primary highway, hard surface Light-duty road, hard or improved surface

Secondary highway, hard surface Unimproved road

Interstate Route U. S. Route State Route

KENSINGTON, GA.
34085-G3-TM-024
1983

DMA 3953 IV SE—SERIES V845