



Prepared by the Army Map Service (ESCAR), Corps of Engineers, U.S. Army, Washington, D.C. Compiled in 1955 by photogrammetric methods and from USGS and AMS quadrangles, 1:48,000; 1:62,500 and 1:50,000. POPULATED PLACES Over 500,000 100,000 to 500,000 25,000 to 100,000 5,000 to 25,000 1,000 to 5,000 Less than 1,000 100,000-foot grid based on Washington coordinate system, north zone 10,000-meter Universal Transverse Mercator grid ticks, zone 10, shown in blue

LEGEND

Figures in red denote approximate distances in miles between stars

ROADS

Double or Multiple Lane Road

Single Lane Road

Standard gauge

Narrow gauge

Landplane airport

Landing area

Seaplane airport

Seaplane anchorage

Woods-brushwood; Orchard

Landmarks: School; Church; Other

Horizontal control point

Spot elevation in feet

Marsh or swamp

Intermittent or dry stream

Power line

Scale 1:250,000

0 5 10 15 20 Statute Miles

0 5 10 15 20 Kilometers



0 5 10 15 20 Nautical Miles

CONTOUR INTERVAL 200 FEET WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS

TRANSVERSE MERCATOR PROJECTION

1955 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 23°00' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 22°30' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°03' WESTERLY

FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER 25, COLORADO OR WASHINGTON 25, D. C.

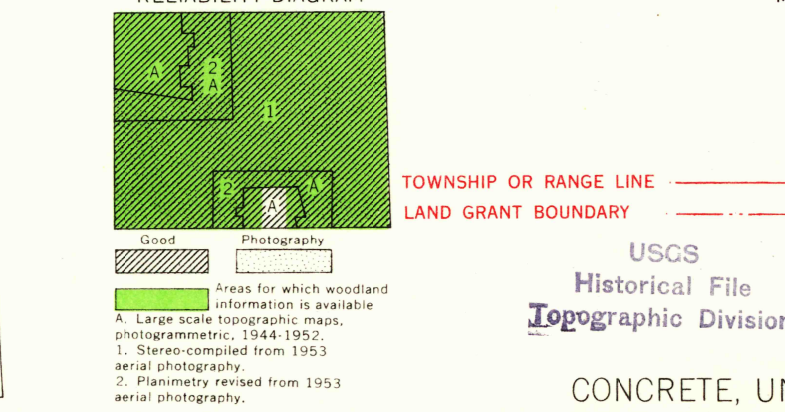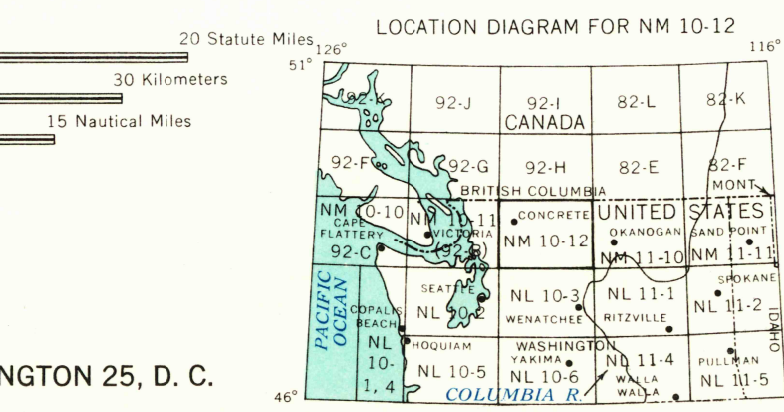

7-37-1962
SECTION 44
TOWNSHIP 6070

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

USGS
Historical File
Topographic Division

CONCRETE, UNITED STATES; CANADA