



Produced by the United States Geological Survey
Topography compiled 1997. Planimetry derived from imagery taken 1997 and other sources. Public Land Survey System and survey control current as of 1990. Boundaries current as of 1999
North American Datum of 1983 (NAD 83). Projection and 1 000-meter grid: Universal Transverse Mercator, zone 12
2 500-meter ticks: Utah Coordinate System of 1983 (central zone)
North American Datum of 1927 (NAD 27) is shown by dashed corner ticks. The values of the shift between NAD 83 and NAD 27 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software
Houses of worship, schools, and other labeled buildings verified 1990

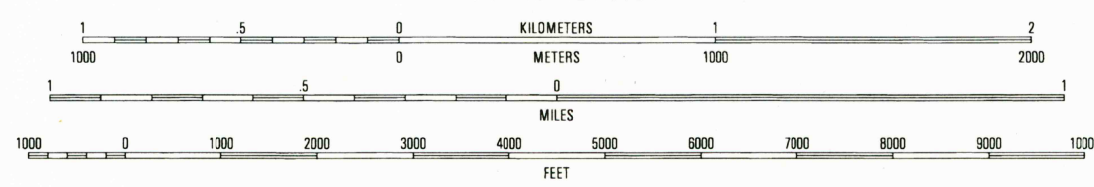

CONTOUR INTERVAL 20 FEET
SUPPLEMENTARY CONTOUR INTERVAL 10 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048



1	2	3
4	5	6
7	8	9

1 Saratoga Springs
2 Pelican Point
3 Orem
4 Soldiers Pass
5 Provo
6 Goshute Valley North
7 West Mountain
8 Spanish Fork

ROAD CLASSIFICATION
Primary highway
hard surface
Secondary highway
hard surface
Light-duty road, hard or
improved surface
Unimproved road
Interstate Route
U.S. Route
State Route

LINCOLN POINT, UT
1997

NIMA 3664 III NE-SERIES V897

RECEIVED
JUL 31 2001
USGS NWL
HISTORICAL MAP ARCHIVES

