




Mapped and edited by Tennessee Valley Authority  
Published by the Geological Survey  
Control by US&GS, USGS, USED, and TVA  
Topography by USGS and TVA by multiplex methods from aerial  
photographs taken 1948. Field examination by TVA, 1950  
Polyconic projection, 1927 North American datum  
10,000-foot grid based on Alabama (West) rectangular  
coordinate system

TRUE NORTH  
MAGNETIC NORTH  
APPROXIMATE MEAN  
DECLINATION 1950

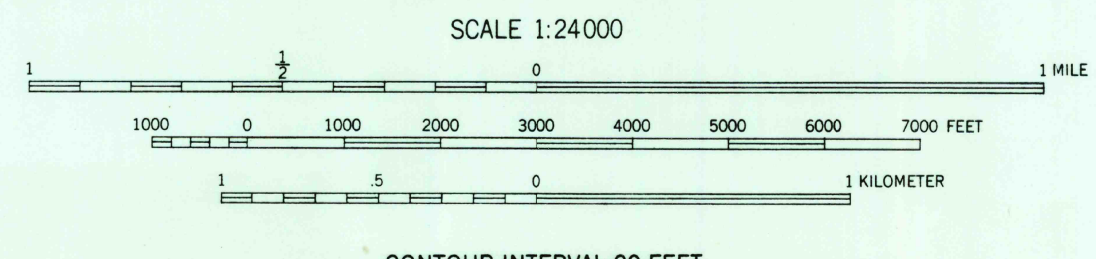

CONTOUR INTERVAL 20 FEET  
DASHED LINES REPRESENT HALF-INTERVAL CONTOURS  
DATUM IS MEAN SEA LEVEL  
THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.  
AND BY U. S. TENNESSEE VALLEY AUTHORITY, CHATTANOOGA OR KNOXVILLE, TENN.  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION  
HARD-SURFACE ALL WEATHER ROADS  
Heavy-duty ——— 4 LANE 18 LANE  
Medium-duty ——— 4 LANE 18 LANE  
Loose-surface, graded, or narrow hard-surface - - -  
U. S. Route State Route  
DEC 2 1 1978  
USGS  
Historical File  
Topographic Division  
PLEASANT SITE, ALA.  
N3430-W8800/7.5  
PRINTED 1951