
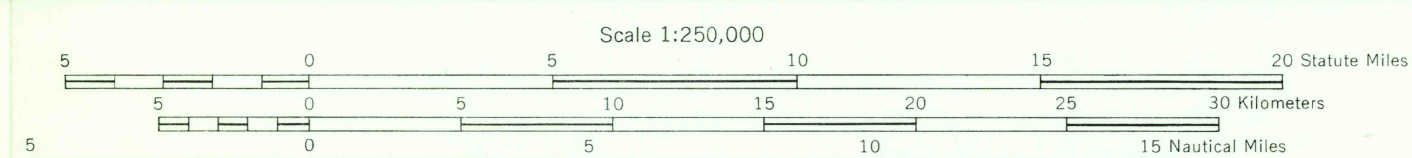


Prepared by the Army Map Service (ASCS), Corps of Engineers, U.S. Army, Washington, D.C. Compiled in 1955 by photogrammetric methods and from USGS quadrangles 1946-1952, USGS & GS Charts, 1952-1953, and AMS quadrangles 1946-1947. Planimetric detail revised by photogrammetric methods. Horizontal and vertical control by US & GS, USGS and Florida Geodetic Survey. Photographic field annotated 1955. Minor corrections by U.S. Geological Survey 1962.

100,000-foot grids based on Florida coordinate system east and west zones 10,000-meter Universal Transverse Mercator grid ticks, zone 17, shown in blue



Approximate road alignment

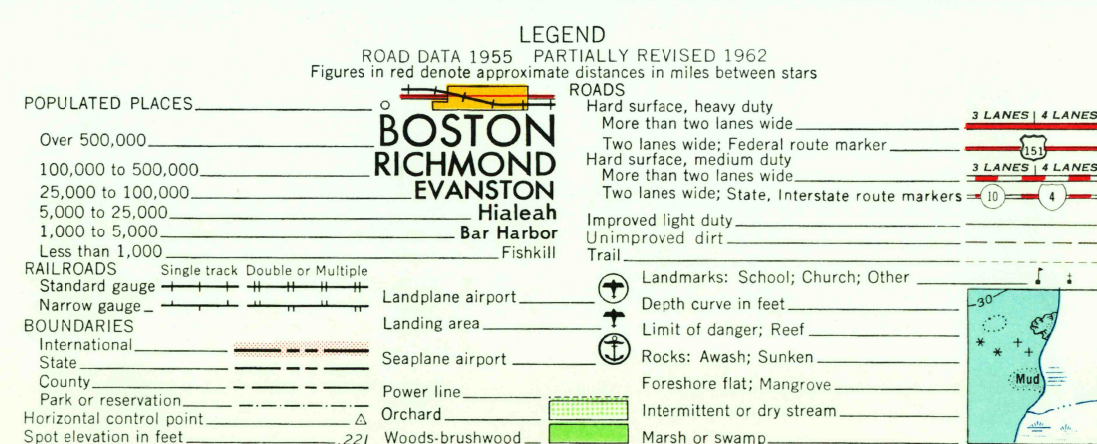

CONTOUR INTERVAL 50 FEET
WITH SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS
TRANSVERSE MERCATOR PROJECTION

1955 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 1°30' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 0°15' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°01' WESTERLY.

FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.

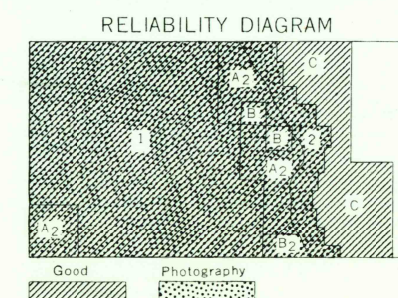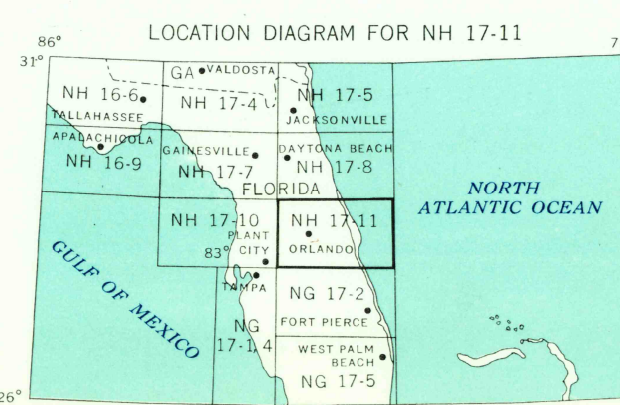

A. Large scale topographic map, photogrammetric and controlled ground survey, 1946-52.
B. Large scale topographic map, photogrammetric survey, 1951-52.
C. Medium scale hydrographic charts, 1952-53.
1. Stereo compiled from 1945-50 aerial photography.
2. Planimetry revised from 1945-50 aerial photography.

INTERIOR-GEOLOGICAL SURVEY, WASHINGTON, D.C.-1962

TOWNSHIP OR RANGE LINE

LAND GRANT BOUNDARY

USGS
Historical File
Topographic Division

ORLANDO, FLORIDA