


To convert feet to meters multiply by .3048
To convert meters to feet multiply by 3.2808

Produced by the United States Geological Survey
Control by USGS and NOS/NOAA
Orthophotomap prepared from aerial photographs taken January 10, 1976. Compiled by photogrammetric methods from aerial photographs taken January 1975 and from planetable surveys 1978
Field checked 1976. Map edited 1982
Supersedes topographic map dated 1943
Projection and 10,000-foot grid ticks: Florida coordinate system, north zone (Lambert conformal conic)
1000-meter Universal Transverse Mercator grid, zone 16
1927 North American Datum
To place on the predicted North American Datum 1983 move the projection lines 20 meters south and 8 meters west as shown by dashed corner ticks



CONTOUR INTERVAL 2 METERS
SUPPLEMENTARY CONTOUR INTERVAL 1 METER
DASHED SUPPLEMENTARY CONTOURS ARE APPROXIMATE
NATIONAL GEODETIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO NEAREST 0.5 METER

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

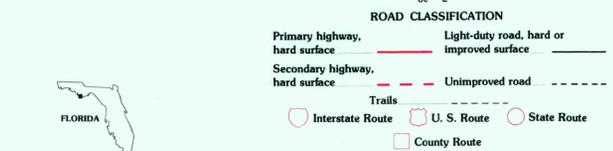

CONTOURS AND ELEVATIONS IN METERS



WHITE CITY, FLA.
29085-H3-OM-024
1982
DMA 3943 1 NW - SERIES U8470

APR 09 1982