

LEGEND

ROAD DATA 1953

POPULATED PLACES

RAILROADS

Other features:

- Spot elevation in feet
- Depth curves in fathoms
- Swamp, marsh
- Reef; Limit of danger line
- Intermittent stream
- Rocks; Awash; Sunken
- Foreshore flats

Scale 1:250,000

CONTOUR INTERVAL 200 FEET

TRANSVERSE MERCATOR PROJECTION


BLACK NUMBERED LINES INDICATE THE 10,000 METRE UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 13

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

Prepared by the Army Map Service (AM), Corps of Engineers, U. S. Army, Washington, D. C. Compiled in 1951 from United States Geological Survey Mining Area Maps 1:12,000, 1927-40; United States Quadangles, 1:62,500, 1:125,000, United States Geological Survey, 1894-1924; County Highway Maps 1935-46; and intelligence data to 1953. Planimetric detail partially revised by photogrammetric methods. Control by USGS and USGS.

100,000-foot grids based on Colorado coordinate system, south zone

V502, EDITION 2

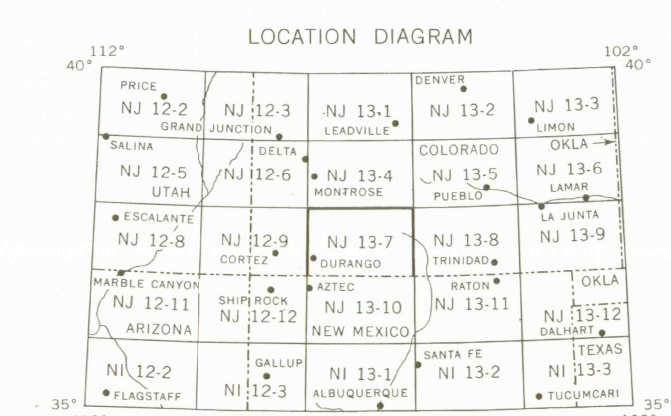

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

GRID ZONE DESIGNATION

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

SAMPLE POINT: CHURCH PARK

1. Read letters identifying 100,000-meter square in which the point lies.

2. Locate first horizontal line to left of point and read LARGE figure labeling of this line.

3. Locate first horizontal line to right of point and read LARGE figure labeling of this line.

4. Estimate tenths from grid line to point.

5. Estimate hundredths from grid line to point.

SAMPLE REFERENCE:

4190000

13200000

DURANGO, COLORADO

1945

STOCK NO. V502XN137***02

FEB 12 2003

OFFICE COPY
LIBRARY USE ONLY